


# Particleboard Core

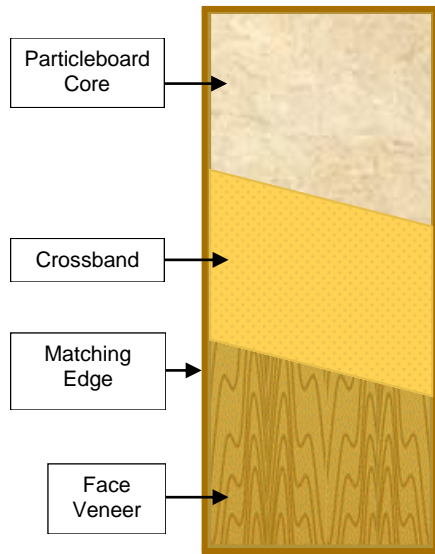

- Non Rated
- Fire Rated 20 Minute

**STREK•O**  
*A great name in doors since 1940*

## Product Features

<b>Construction:</b>	Bonded 5 Ply Hot Press		
<b>Core:</b>	Bonded Particleboard Core (conforming to ANSI A 208.1 1 LD-2)		
<b>Door Thickness:</b>	Non-rated	1 3/4", 1 3/8", 2 1/4" (other options avail.)	
	20 Minute	1 3/4", 1 3/8" (Max 3/0 x 7/0), 2 1/4"	
<b>Maximum Size:</b>	Single (non-rated)	5/0 x 12/0	
	Pair (non-rated)	10/0 x 12/0	
		<u>Neutral Pressure</u>	<u>Positive Pressure</u>
	Single (20 minute)	5/0 x 10/0	5/0 x 10/0
	Pair (20 minute)	10/0 x 10/0	10/0 x 9/0
	Double Egress Pair (20 minute)	8/0 x 8/0	8/0 x 9/0
<b>Stiles:</b>	1 3/8" prior to factory trimming; glued to the core (other options available)		
<b>Top &amp; Bottom Rails:</b>	1 1/2" Mill Option (Wider rails available)		
<b>Faces:</b>	All Veneer Species, Medium Density Overlay (MDO)		
<b>Veneer Matching:</b>	Available in Pairs, Sets, & Transoms (special matching available)		
<b>Crossbands:</b>	High Density Fiberboard (HDF)		
<b>Adhesives:</b>	Type 1 (Waterproof)		
<b>Max Lite Openings:</b>	<u>Non-rated:</u> Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 38" in width and 54" in length.		
	<u>20 Minute:</u> (Requires approved glass) Total sq. in. not to exceed 1296. Lite opening dimensions not to exceed 36" in width and 54" in length. (1 3/8" thick not to exceed 100 total sq in.)		
<b>Machining/Finishing:</b>	Prefit, Bevel, & complete Factory Machining and Factory UV Finishing available		
<b>Warranty:</b>	Life of Original Installation - <i>Warranty does not apply for exterior applications</i>		
<b>Specifications:</b>	Meets WDMA & AWI quality standards (Contact sales for label approvals)		
<b>Environmental/LEED Options:</b>	MR4-Recycled Content/MR5-Regional Materials/MR6-Rapidly Renewable Materials/MR7-Certified Wood/IEQ4.4-Low-Emitting Materials (No added Urea Formaldehyde Resins)		